

A Company

Dine	o ot	
-10	iect	

ltem # ___

Quantity

NATURAL

GAS TYPE:

- ARHP HOT PLATES
- ARHP-12-2
 ARHP-24-2

 ARHP-24-4
 ARHP-36-3

 ARHP-36-6
 ARHP-48-4

 ARHP-48-8
 ARHP-60-10

STANDARD FEATURES

- Two piece lift off 32,000 BTU/hr. burners
- Heavy duty removable, 12" x 12" cast-iron grates
- Manual gas control valve for each burner
- Stainless steel pilots for instant ignition on each burner
- Full-width removable crumb tray for easy cleaning
- Set of 4 adjustable 4" counter legs (12" to 48" models)
- Set of 6 adjustable 4" counter legs (60" models)
- Die cast, red control knob.
- Available in several widths from 12", 24", 36", 48", and 60"
- Two year limited warranty, parts and labor

OPTIONAL FEATURES

- Stainless steel stands
- Casters for stands




Model ARHP-36-6

I P

American Range Hot Plate series ARHP series comes in a variety of burner configuations. Low profile gas hotplate. Stainless steel front, sides and front top ledge. 10" cooking height on 4" legs. 32,000 BTU/hr. open burners with lift-off heads. Cast iron top grates. Full-width front crumb trays. One infinite heat control valve for each burner. Standing pilot ignition system. 3/4" rear gas connection Natural gas or LP.




DESIGNED & BUILT IN USA





13592 Desmond St Pacoima CA 91331 T. 818.897.0808 Toll Free: 888.753.9898 www.AmericanRange.com

ARHP HOT PLATES

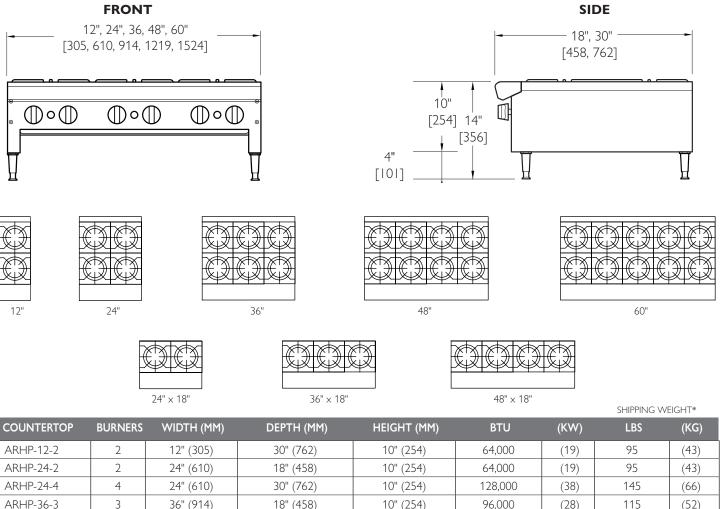

	-	2 . (0.0)			0 1,000	()	, 0
HP-24-4	4	24" (610)	30" (762)	10" (254)	128,000	(38)	145
HP-36-3	3	36" (914)	18" (458)	10" (254)	96,000	(28)	115
HP-36-6	6	36" (914)	30" (762)	10" (254)	192,000	(56)	210
HP-48-4	4	48" (1219)	18" (458)	10" (254)	128,000	(38)	140
HP-48-8	8	48" (1219)	30" (762)	10" (254)	256,000	(75)	270
HP-60-10	10	60" (1524)	30" (762)	10" (254)	320,000	(94)	325

• Specify type of gas and altitude if over 2000 feet.

Please specify gas type when ordering.

COMBUSTIBLE WALL CLEARANCES:

For use only on non-combustible floors. Legs or casters are required, or 2" (51) overhang is required when curb mounted. Clearance from noncombustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305) from sides, and 4" (102) from rear.

Commercial cooking equipment requires an adequate ventilation system. For additional information, refer to the National Fire Protection Association's standard.

NFPA96 "Vapor Removal from Cooking Equipment." (NOTE: For North America only)

American Range is a quality manufacturer of commercial cooking equipment. Because of continuing product improvements these specifications are subject to change without prior notice.



ARH

AR⊢

ARH

ARH

*Shipping weight includes packaging and is approximate.

MANIFOLD PRESSURE					
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE			
5.0" W.C.	10.0" W.C.	3/4" (19MM)			





(52)

(95)

(64)

(122)

(147)