



PROJECT NAME: _____

LOCATION: _____

ITEM: _____ QTY: _____

MODEL: _____



MODEL SRRB-24
(Pictured above)

SRRB-12 | SRRB-24 SRRB-36 | SRRB-48 COUNTERTOP RADIANT GAS CHARBROILER - SRRB SERIES

Sierra series countertop radiant gas charbroiler was developed to provide the best cooking experience, combining high standard of quality, performance and durability to satisfy all professional kitchens demands.



STANDARD FEATURES

- 🔥 Available in 12" (305 mm), 24" (610 mm), 36" (915 mm), and 48" (1,220 mm) width.
- 🔥 Stainless steel front and sides.
- 🔥 3" Splash guards.
- 🔥 Double sided cast iron grates. One side for meats, the other for delicate fish.
- 🔥 Cast iron radiant for optimum heat distribution that are individually removable for easy cleaning.
- 🔥 Enameled burners placed every 12", providing uniformity when operating.
- 🔥 Accessible pilots through front panel.
- 🔥 Orange paint injected aluminum knobs providing for better toughness and durability.
- 🔥 4" adjustable chromed carbon steel legs.
- 🔥 Units are shipped ready for natural gas (NG). A propane gas (LP) conversion kit and NG/LP regulator is supplied with the unit.
- 🔥 Easily removable stainless steel giddle grease trap.

CRUMB / DRIP TRAY CAPACITY

COLLECTING DRIP TRAY CAPACITY	MODEL			
	SRRB-12	SRRB-24	SRRB-36	SRRB-48
	1 gal (3.9 L)	2.37 gal (9 L)	4.1 gal (15.6 L)	5.8 gal (22,2 L)

ACCESSORIES/OPTIONAL

- 🔥 Pressure regulator
- 🔥 Propane gas (LP)/natural gas (NG) conversion kits.

SRRB05172022



www.mvpgroupcorp.com



3560 NW 56th Street
Fort Lauderdale, FL 33309
Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax.: 786.661.4100




5659 Royalmount Avenue
Montreal, Qc, Canada H4P 2P9
Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax.: 514.342.3854 / Toll Free: 877.453.8832

sales@mvpgroupcorp.com



TECHNICAL DRAWINGS

COUNTERTOP RADIANT GAS CHARBROILER - SRRB SERIES
SRRB-12 | SRRB-24 | SRRB-36 | SRRB-48

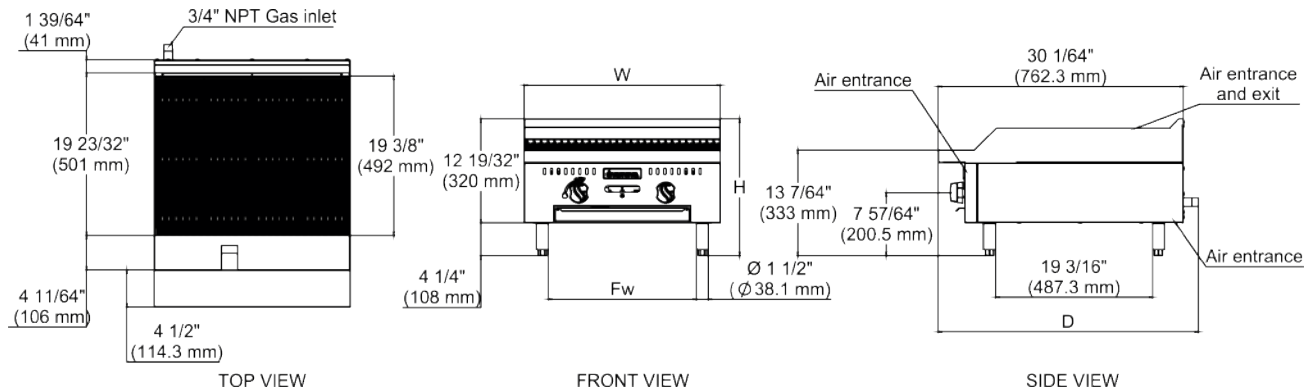

SPECIFICATIONS

Models	Exterior Product Dimensions & Weight					Shipping Crate Dimensions & Weight			
	Width (W)	Depth (D)	Height (H)	Fw	Weight	Width	Depth	Height	Weight
SRRB-12	12" (305 mm)	32" (812.8 mm)	16 27/32" (428 mm)	9 5/64" (230.5 mm)	77 lb (35 kg)	20 7/8" (530 mm)	34 1/4" (870 mm)	19 19/64" (490 mm)	108lb (49 kg)
SRRB-24	24" (610 mm)	32" (812.8 mm)	16 27/32" (428 mm)	18 3/32" (459.5 mm)	152 lb (69 kg)	28 61/64" (710 mm)	34 1/4" (870 mm)	19 19/64" (490 mm)	183 lb (83 kg)
SRRB-36	36" (915 mm)	32" (812.8 mm)	16 27/32" (428 mm)	31 9/32" (794.5 mm)	212 lb (96 kg)	40 5/32" (1020 mm)	34 1/4" (870 mm)	19 19/64" (490 mm)	258 lb (117 kg)
SRRB-48	48" (1220 mm)	32" (812.8 mm)	16 27/32" (428 mm)	43 9/32" (1099.5 mm)	280 lb (127 kg)	52 31/32" (1320 mm)	34 1/4" (870 mm)	19 19/64" (490 mm)	329 lb (149 kg)

UTILITY INFORMATION

Models	Burners	GAS SUPPLY					
		Propane		Natural		Manifold Pressure	
		BTU/h		BTU/h		Natural Gas	Propane Gas
SRRB-12	1	30,000		30,000		4" W.C	10" W.C
SRRB-24	2	60,000		60,000			
SRRB-36	3	90,000		90,000			
SRRB-48	4	120,000		120,000			

- 30,000 BTU/h burners placed every 12", providing best performance.
- Manifold pressure is 4" W.C (natural gas) or 10" W.C (propane gas).
- 3/4" NPT rear gas connection and pressure regulator for both natural gas and propane.
- Check the altitude specifications above 2,000 ft.

* NOTE: In line with its policy to continually improve its product, Sierra reserves the right to change materials and specifications without notice.

INSTALLATION INSTRUCTIONS

A pressure regulator sized for this unit is included. The gas line connecting to the range must be 3/4" or larger. If flexible connectors are used, the inside diameter must be 3/4" or larger. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, www.NFPA.org. When writing, refer to NFPA No. 96.4. These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code. Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, www.AGA.org.

Warranty: 12 months parts & labor. See Sierra Price List for full details.

Gas Connection: 3/4" NPT on the right hand rear of the appliance. The pressure regulator (supplied) is to be connected here by the installer.

Gas pressure: 4" W.C. - Natural Gas | 10" W.C. - Propane.

Combustible Clearances: For use in non-combustible locations | Non-combustible Clearances: 0 inches sides, 0 inches rear Specify type of gas and altitude, if over 2,000 feet, when ordering.

SIERRA is a registered trademark of **MVP Group**.

Due to continuing product development, to ensure best possible performance, the specifications are subject to change without prior notice.



3560 NW 56th Street
Fort Lauderdale, FL 33309
Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax.: 786.661.4100



5659 Royalmount Avenue
Montreal, Qc, Canada H4P 2P9
Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax.: 514.342.3854 / Toll Free: 877.453.8832

sales@mvpgroupcorp.com