

ED2-48 Series ED2SYS-48 Series Heated Display Systems



ED2-48



ED2SYS-48




- Halo Heat ...a controlled, uniform heat source that gently holds and surrounds food for better appearance, taste, and longer holding life.
- Holds and displays hot food fresh and moist for hours — without adding water.
- Expandable system to meet your specific requirements.
- Matches profile of leading refrigerated display case.
- Hot Display Case
 - Curved glass styling.
 - Displays hot food without condensation on glass.
 - Protected with an environmentally friendly bumper, made of 93% pre-consumer polycarbonate waste and is 100% recyclable.
 - Thermostatically controlled heat source radiates from the base of the display case in multiple heat zones.
 - Overhead light zones with shatterproof coated bulbs.
 - Holds a full range of standard (gastronorm) pan sizes, full-size or half-size sheet pans.
 - Tempered sliding glass doors reflect heat back into the products and mirror the display to enhance merchandising effect.
- Decorator Base
 - Standard black painted front and end panels.

The display case is constructed of 18-gauge, non-magnetic stainless steel. A tempered glass front encloses the display case and can be lifted to a 90° angle for easy cleaning. Removable, sliding glass doors on the operator side are included. Sliding door tracks have a "clean sweep" cutout allowing for easy cleaning and crumb removal. Framed end glass with rubber gasket material protects glass edges from chipping and breakage. The base is divided into two (2) individually managed heat zones with each zone controlled by a separate thermostat with a range of 1 through 10 and heat-on indicator light. Overhead lights are controlled by ON/OFF switches in two (2) light zones. Up to two (2) 125V plug outlets are available as an option on 120/208-240V units only. Countertop display cases include one set of 4" (102mm) legs.

- ED2-48 - 48" (1219mm) length
- ED2SYS-48* - 48" (1219mm) length, with base

*The system base is not sold as a separate item. Order the full ED2SYS model to receive the base.



Factory Installed Options


- | | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Electrical Choices <ul style="list-style-type: none"> <input type="checkbox"/> 120/208-240V <input type="checkbox"/> 230V | <ul style="list-style-type: none"> • Panel Color Choices <ul style="list-style-type: none"> <input type="checkbox"/> Black, standard <input type="checkbox"/> Stainless Steel, optional <input type="checkbox"/> Custom Color, optional | <ul style="list-style-type: none"> • End Glass Choices <ul style="list-style-type: none"> <input type="checkbox"/> Clear Glass, standard <input type="checkbox"/> Solar Bronze Glass, optional [5011353] | <ul style="list-style-type: none"> <input type="checkbox"/> Temperature Gauge, optional [GU-48153] <input type="checkbox"/> Independent Electrical Outlet, optional [5001781] |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|




W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.
 Phone: 262.251.3800 800.558.8744 U.S.A./CANADA Fax: 262.251.7067 800.329.8744 U.S.A. only
www.alto-shaam.com

ED2-48 Series/ED2SYS-48 Series

Heated Display Systems

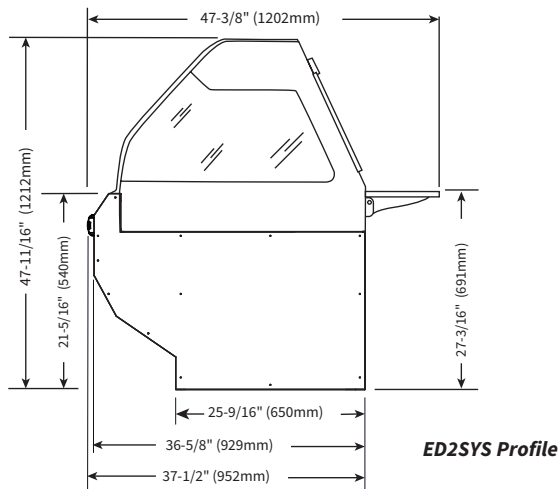


ED2SYS Profile

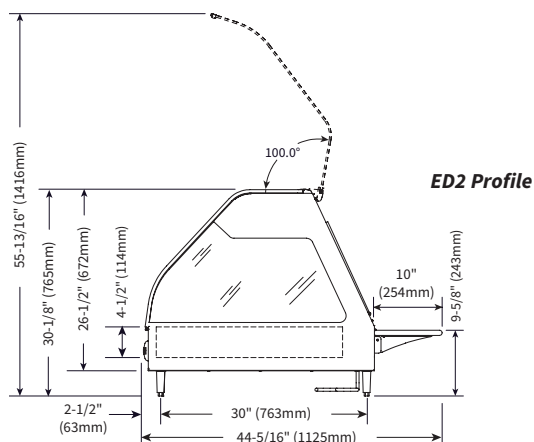

ED2 Profile

ED2SYS-48

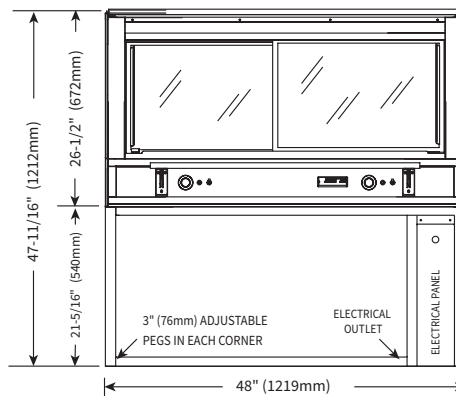


Dimensions

Exterior, countertop model with legs: [H x W X D]
30-1/8" x 48" x 44-5/16" [765mm x 1219mm x 1125mm]

Exterior, with base
47-11/16" x 48" x 47-3/8" [1212mm x 1219mm x 1200mm]

Well dimensions [W x L x D]:
27-3/16" x 45-5/16" x 4-1/2" [690mm x 1151mm x 114mm]

48 Series

V	Ph	Hz	A	kW	
120/208-240	1	50/60	13.8	3.3	NEMA L14-20P 20A, 250V plug  [Plug - countertop only; terminal block - system]
[208]	1	50/60	12.0	2.5	
[240]	1	50/60	13.8	3.3	

Pan Configuration*

Pan Size	Dimensions	Qty.
Full-Size & One-Third**:	12" x 20" x 2-1/2" [GN 1/1]	3
	12" x 6" x 2-1/2" [GN 1/3]	3
Half-Size & One-Third**:	12" x 10" x 2-1/2" [GN 1/2]	6
	12" x 6" x 2-1/2" [GN 1/3]	3
Full-Size Sheet Pans:	18" x 26" x 1"	2
Max. Capacity/Volume:	48 lbs [22 kg] 30 qts [36 L]	

* Pans are not included with display case.

** Will also accept 4" [100mm] deep pans.

Specifications

- Six (6) overhead lights with two (2) light zones.
- Two (2) base heat zones with two (2) adjustable thermostats with a range of 1 through 10, and two (2) heat-on indicator lights.
- Two (2) tinted, reflective, tempered glass sliding doors on operator side.
- One (1) 10" x 36" [254mm x 914mm] operator-side work shelf.
- Easy recipe upload/download via USB port

Installation Requirements

Display case must be installed level. The display case must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

Do not install a heated display case near a cold air source such as a freezer, air conditioning vents, or in any area where outside air fluctuation can affect performance.

Weight :

ED2-48	297 lb [135 kg]	372 lb [169 kg]
ED2SYS-48	450 lb [204 kg]	500 lb [227 kg]

Crated dimensions : L X W X H

ED2-48:	45" x 52" x 45" [1143mm x 1321mm x 1143mm]
ED2SYS-48:	65" x 60" x 55" [1651mm x 1524mm x 1397mm]

Accessories

Seamlessly connect multiple units		Platform scale (customer side)	
<input type="checkbox"/> Butting kit, countertop	5015249	<input type="checkbox"/> Left-hand	5001308
<input type="checkbox"/> Butting kit, system	5008523	<input type="checkbox"/> Right-hand	5001307
<input type="checkbox"/> Sheet Pan Divider Bar Package	5002802	<input type="checkbox"/> Thermostat Guard cover plate (2 per unit)	5007660
		<input type="checkbox"/> Work shelf with gravy lane	5005638



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.
PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

www.alto-shaam.com

