

HANDY NORTH AMERICA H29E-A

| | |
|---------------|--|
| TYPE | Glasswasher |
| LINE | HANDY NORTH AMERICA |
| BASKET | 400x400 |
| SIZE | 470x535x710h - 18.5039x21.063x27.9528in |



The H29E-A model, available with round rack or with square rack, is suitable for washing cups, glasses, saucers and dishes (using the appropriate rack) with a clearance of up to 295 mm. The drain pump option allows you to handle the drain automatically and perform a partial replacement of clean water at each wash cycle.

This model is ETL and ETL Sanitation certified as it meets the requirements of the NSF/ANSI 3 rule. The washing cycles have been specifically designed to make the dishwasher compliant with the NSF hygienic safety standards, recognized by the American National Standards Institute (ANSI).

The HANDY line stands out for its wide range of models suitable for any situation. The simple electronic board control system makes it possible to set and control the rinsing and draining times and temperatures and the relevant Thermostops, crucial for ensuring excellent final results. With the control panel you can choose one of its 4 washing cycles and one automatic drain cycle (with installed drain pump), easily view on the display the tank and boiler temperature, the messages of the Self-diagnosis system and the Scheduled Maintenance warning. The smart Start button changes colour to always keep you up-to-date on the dishwasher status with the greatest ease.


The electronic control allows you to manage various parameters to give you an absolute customisation level and the continuous self-diagnosis allows you to minimise machine downtime, suggesting some operations that need to be verified. The self-cleaning cycle at the end of the day cleans the wash tank and empties the hot water from the boiler, preventing limestone from building up inside. The standard double peristaltic electric rinse-aid and detergent dispenser ensures the best result from each wash cycle with great savings thanks to the precise dosage managed by the electronic card; whereas, the moulded washing and rinsing arms ensure great reliability and durability. The Thermo-stop function checks that washing and rinsing begin only when the desired temperature is reached. The bodywork is made entirely of AISI 304 steel and has been designed with all of the components in the front for easy technical assistance. Sturdy and reliable dishwashers to best deal with every moment of your day.

CERTIFIED



ON REQUEST



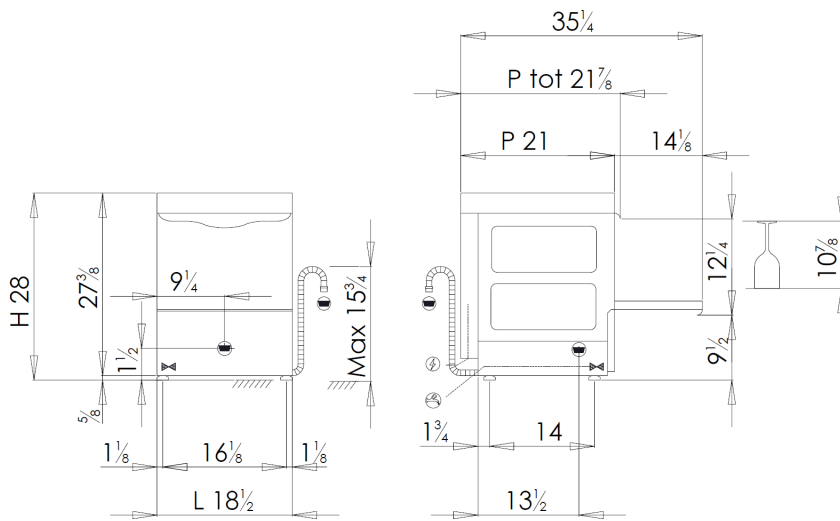

DISHWASHERS FEATURES

| | |
|--|--|
| Dimensions - (mm) L - P - H | 470x535x710h - 18.5039x21.063x27.9528in |
| n° baskets/hour - (+55°C) | Max 48 |
| Height glass max | 285mm |
| Ø height plate max | 305mm |
| Rinsing and washing arms | Ø18 INOX |
| Tank heating element - Tank capacity | 2,6kW - 17lt |
| Boiler heating element - Boiler capacity | 2,5kW - 3,2lt |
| Washing pump | 0,26kW / 0,35Hp |
| Total power input / Current | 2,86kW / 16A |
| Standard input voltage | 208V - 60Hz |
| Recommended inlet water temperature | +55°C |
| Water hardness | 7÷10 °f |
| Water consumption per cycle (inlet suggested pressure 2 BAR) | 2,0lt |
| Adjustable detergent and rinse-aid dispenser | ELECTRIC |
| imballo_mm_-_m3_-_kg | 470x535x710h 0,34/48 |

STANDARD EQUIPMENT

| | |
|--------------------------------------|---|
| Saucer holder 12 pieces | 1 |
| Cutlery insert | 1 |
| Basket for glasses dim.400x400x150mm | 2 |

OPTION

| | |
|--|---|
| Drain pump kit 40W | ● |
| Thermo/acoustic insulation double wall kit and upper cover | ● |
| Inclined basket for wine glasses dim.400x400x170mm | ● |
| Kit 4 Stainless steel feet 50-70mm | ● |

● = INSTALLABLE ACCESSORY , ◻ = NOT INSTALLABLE ACCESSORY