

HANDY NORTH AMERICA H54E-A

TYPE	Undercounter warewasher
LINE	HANDY NORTH AMERICA
BASKET	500x500
SIZE	585x600x815h - 23.03x23.62x32.09in



With the H54E-A dishwasher you can wash glasses of different shapes and sizes and 18 dishes per cycle with max Ø of 350mm thanks to the racks provided, with a maximum productivity of 40 racks/hour (540 dishes/hour). The drain pump optional allows you to handle draining automatically and perform a partial replacement of clean water at each wash.

This model is ETL and ETL Sanitation certified as it meets the requirements of the NSF/ANSI 3 rule. The washing cycles have been specifically designed to make the dishwasher compliant with the NSF hygienic safety standards, recognized by the American National Standards Institute (ANSI).

The HANDY line stands out for its wide range of models suitable for any situation. The simple electronic board control system makes it possible to set and control the rinsing and draining times and temperatures and the relevant Thermostops, crucial for ensuring excellent final results. With the control panel you can choose one of its 4 washing cycles and one automatic drain cycle (with installed drain pump), easily view on the display the tank and boiler temperature, the messages of the Self-diagnosis system and the Scheduled Maintenance warning. The smart Start button changes colour to always keep you up-to-date on the dishwasher status with the greatest ease.

The electronic control allows you to manage various parameters to give you an absolute customisation level and the continuous self-diagnosis allows you to minimise machine downtime, suggesting some operations that need to be verified. The self-cleaning cycle at the end of the day cleans the wash tank and empties the hot water from the boiler, preventing limestone from building up inside. The standard double peristaltic electric rinse-aid and detergent dispenser ensures the best result from each wash cycle with great savings thanks to the precise dosage managed by the electronic card; whereas, the moulded washing and rinsing arms ensure great reliability and durability. The Thermo-stop function checks that washing and rinsing begin only when the desired temperature is reached. The bodywork is made entirely of AISI 304 steel and has been designed with all of the components in the front for easy technical assistance. Sturdy and reliable dishwashers to best deal with every moment of your day.

CERTIFIED



ON REQUEST




CERTIFIED



ON REQUEST



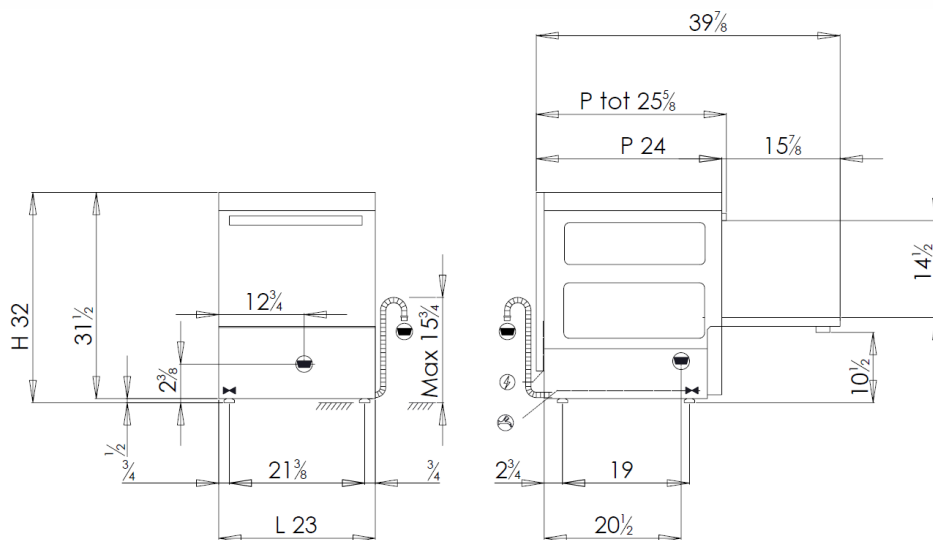

DISHWASHERS FEATURES

Dimensions - (mm) L - P - H	585x600x815h - 23.03x23.62x 32.09in
n° baskets/hour - (+55°C)	Max 40
Height glass max	365mm
Ø height plate max	395mm
Rinsing and washing arms	Ø18 INOX
Tank heating element - Tank capacity	2,6kW - 24lt
Boiler heating element - Boiler capacity	2,5kW - 7,3lt
Washing pump	0,52kW / 0,7Hp
Total power input / Current	3,12kW / 16A
Standard input voltage	208V - 60Hz
Recommended inlet water temperature	+55°C
Water hardness	7÷10 °f
Water consumption per cycle (inlet suggested pressure 2 BAR)	2,0lt
Adjustable detergent and rinse-aid dispenser	ELECTRIC
Built-in drain pump	45W
imballo_mm_-_m3_-_kg	680x780x1030h 0,55/64

STANDARD EQUIPMENT

Cutlery insert	2
Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	1

OPTION

Stainless steel tank filter kit for rack dishwasher 500x500	-
Basket for trays with 4 compartments dim.500x500x200mm	●
Inclined basket for wine glasses dim.500x500x170mm	●
Kit 4 Stainless steel feet 50-70mm	●

● = INSTALLABLE ACCESSORY , - = NOT INSTALLABLE ACCESSORY